



## Products for Chemical

- ✓ Digital Earth Resistance Tester
- ✓ Multifunction Panel Meters
- ✓ Power Line Transducers
- ✓ Analog Panel Meters
- ✓ Digital Panel Meters
- ✓ Digital Multimeters
- ✓ Digital Clampmeters
- ✓ Testing & Measuring Instruments
- ✓ Environmental Testing Instruments
- ✓ Infrared Thermometer

**+60** YEARS  
ONE MISSION



Reliable



Long-Lasting



Affordable

## Digital Earth Resistance Tester



- ✓ 3½ Digit / 1999 Counts LCD
- ✓ Re-Chargeable Batteries
- ✓ Designed to Reject High Levels of Noise & Interference
- ✓ Range Selection & Single Person Operation
- ✓ Low Battery Indication
- ✓ IEC 1010 CAT III 200V
- ✓ Designed to Generally Conform to IS 10656-1983
- ✓ Capable of Measuring Earth Voltage (0 - 10V AC)


**MECO DET 909 is Designed with Technical Know from FUSO Electric Company of Japan.**

## 3 Phase Multifunction Power & Energy Meter - TRMS



- ✓ TRMS Measurement
- ✓ 4 Rows 4 Digit Super Bright LED Display
- ✓ 3P2E3W / 3P3E4W User Selectable
- ✓ Programmable for CTR, PTR, Instrument Address, Password & Energy Reset
- ✓ Energy Import - Export (4Q Operation)
- ✓ Energy Retention
- ✓ RS485 Port, 5KV Isolated with MODBUS RTU Protocol with Software
- ✓ 85-265V AC/DC or 19-90V AC/DC Auxilliary Supply

## 1 Phase Multifunction Meter - TRMS

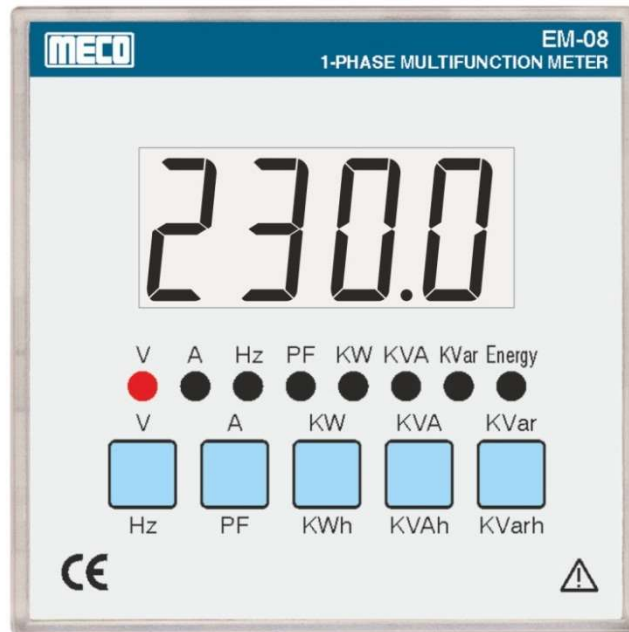

- ✓ 4 Digit LCD Display with Backlight
- ✓ TRMS Measurement
- ✓ 10 Parameters on 10 Display Pages
- ✓ Measures V, A, PF, Hz, KW, KVA, KVar, KWh, KVAh & KVarh
- ✓ Programmable CTR (1.000 - 99.99)
- ✓ LED Indicator for Parameter Indication
- ✓ Power Master Software
- ✓ RS485 Port, 5KV Isolated with MODBUS RTU Protocol

## POWER LINE TRANSDUCERS


CE



- ✓ Low Ripple in Output Signal
- ✓ Choice of Multiple Asymmetrical Outputs
- ✓ Wide Choices of Suppressed Ranges
- ✓ Open and Short Circuit Protection for Outputs
- ✓ Dual Output (Non-Isolated)
- ✓ Self-Powered, AC, DC, SMPS Auxilliary Supply
- ✓ Bi-Directional Outputs
- ✓ Fast Response Time
- ✓ Bi-Directional Inputs for Import / Export

## ANALOG PANEL METERS

CE

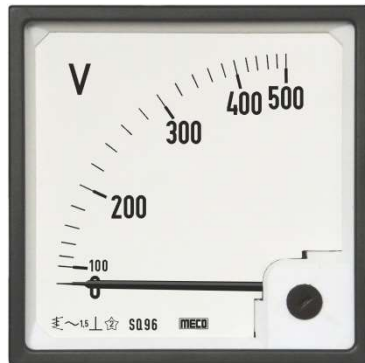

- ✓ AC Moving Iron Meters
- ✓ DC Moving Coil Meters
- ✓ AC Moving Coil Rectifier Type Meters
- ✓ Electronic Type W / VAR / PF / Hz Meters
- ✓ Rectangular AC & DC Meters
- ✓ Standard : IS1248
- ✓ Deflection : 90°C & 240°C
- ✓ Size (mm) : 72 x 72, 96 x 96, 144 x 144 & 110 x 110

## 4 Digit Programmable Ammeter / Voltmeter - TRMS

CE



- ✓ 4 Digit 9999 Counts Super Bright Display
- ✓ TRMS Using Microcontroller
- ✓ User Programmable Display (CT Primary / PTR / Shunt Value]
- ✓ Auto Selection of Decimal Point
- ✓ Over Range Indication
- ✓ 85-265V AC/DC or 48V DC Auxilliary Supply
- ✓ Accuracy  $\pm 0.5\%$  of FSD
- ✓ Size (mm) : 72 x 72, 48 x 96 & 96 x 96


## 4 Digit Programmable Ammeter / Voltmeter - TRMS (Professional Series)



- ✓ 4 Digit 9999 Counts Red LED Super Bright Display
- ✓ TRMS Using Microcontroller
- ✓ User Programmable Display (CT Primary / PTR / Shunt Value)
- ✓ Auto Selection of Decimal Point
- ✓ Over Range Indication
- ✓ 85-265V AC/DC or 19-90V AC/DC Auxilliary Supply
- ✓ Accuracy  $\pm 0.5\%$  of FSD
- ✓ Size (mm) : 48 x 96 & 96 x 96



## 4 Digit Triple Range Programmable Process Indicator with IP-65 Protection



- ✓ Protection Level IP65 on Front (**Optional**)
- ✓ User Programmable 3 Input Ranges In One Meter
- ✓ Input : 4-20mA, 0-20mA & 0-10V DC
- ✓ 4 Digit 9999 Counts LED Display
- ✓ Programmable Display -1999 to 9999
- ✓ Decimal Point Selectable
- ✓ Overload Indication
- ✓ 85-265V AC/DC or 19-90V AC/DC Auxilliary Supply
- ✓ Accuracy  $\pm 0.5\%$  of FSD
- ✓ Size (mm) : 48 x 96

## 4 Digit Digital Frequency Meter

CE



- ✓ 4 Digit 9999 Counts Red LED Display
- ✓ Interval Measurement Method using Microcontroller
- ✓ Wide Range 40 ~ 5000Hz (FDM4S & FDM964S)
- ✓ High Accuracy Across the Entire Range
- ✓ Auto Selection of Decimal Point
- ✓ Red Antiglare Faceplate with Annunciator
- ✓ Size (mm) : 48 x 96, 96 x 96, 72 x 144 & 144 x 144

## 3½ Digit 2000 Counts Digital Multimeter

CE



- ✓ 1000V DC & 750V AC
- ✓ 10A DC / AC
- ✓ Holster + Magnet
- ✓ Torch Light + Backlight
- ✓ NCV (LED, Buzzer & EF Strength)
- ✓ Resistance, hFE (Transistor Test)
- ✓ Audible Continuity
- ✓ Diode Test
- ✓ Data Hold
- ✓ Auto Power Off

## 3<sup>5</sup>/<sub>6</sub> Digit 6000 Counts TRMS Autoranging Digital Multimeter

CE



- ✓ 1000V DC & 750V AC
- ✓ 20A DC / AC
- ✓ Holster with Stand
- ✓ Temperature (K Type Thermocouple)
- ✓ Frequency, Capacitance, Resistance & Duty Cycle
- ✓ Diode Test, Audible Continuity, Data Hold
- ✓ Backlight, Auto Power Off
- ✓ CAT IV 600V, CAT III 1000V

## 3<sup>5</sup>/<sub>6</sub> Digit 6000 Counts 1000A AC - TRMS Digital Clampmeter

CE



- ✓ 1000A AC
- ✓ 1000V DC & 750V AC
- ✓ Resistance, Capacitance & Frequency
- ✓ Temperature (K Type Thermocouple)
- ✓ Duty Cycle, Diode Test & Data Hold
- ✓ Auto / Manual Ranging
- ✓ Micro Amp Measurement for HVAC Flame Sensors

## Leakage Current Tester

CE



- ✓ 10 $\mu$ A AC Ultra High Resolution
- ✓ 3½ Digit 1999 Counts LCD Display
- ✓ 600V AC / DC
- ✓ AC Current Ranges 0 - 20mA, 200mA, 2A, 60A
- ✓ Wide Frequency Response 40Hz ~ 400 Hz
- ✓ Data Hold
- ✓ Auto Power Off
- ✓ Jaw Opening Cable Dia 30mm max. (approx.)

## Clamp - On Earth / Ground Resistance and Leakage Current Tester


CE



- ✓ Non Contact Ground Resistance Measurement
- ✓ 4 Digit 9999 Counts LCD Backlight Display
- ✓ No Auxilliary Electrodes Needed
- ✓ Ground Resistance Measurement 0.01Ω ~ 1000Ω
- ✓ Leakage Current (0.5mA ~ 30.00A) (Model 4680BLC)
- ✓ Data Storage Memory
- ✓ Data Hold, Noise Signal, Auto Power Off
- ✓ Suitable for Earthing Strip Upto 65mm
- ✓ Suitable for Round Conductor Upto 25mm Dia.

## Phase Sequence Indicator

CE

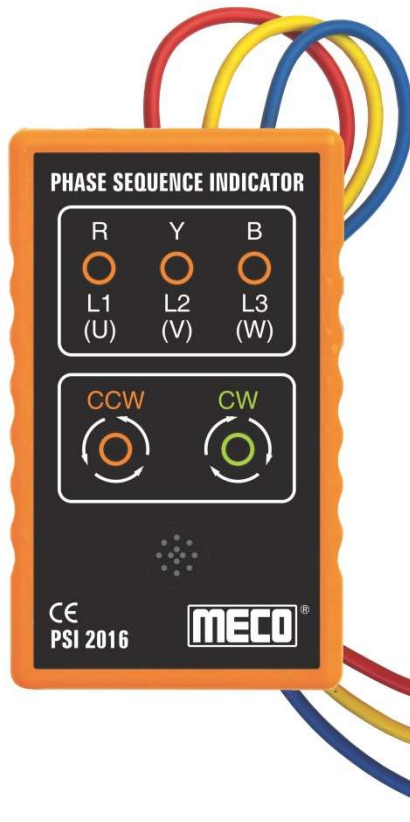


- ✓ 3 Phase Sequence Indication (LED & Buzzer)
- ✓ Reverse Phase Indication (LED & Buzzer)
- ✓ Open Phase Indication (LED & Buzzer)
- ✓ Handy, Rugged & Self Powered
- ✓ R, Y & B Heavy Duty Probes
- ✓ Insulated Crocodile Clips for Safe Connection
- ✓ Voltage Range 100 ~ 600V AC (PH-PH)
- ✓ Frequency Range 40 ~ 400Hz
- ✓ No Battery Required
- ✓ Easy & Safe to Use



## Temperature & Humidity Meter (with Clock & Calendar)



CE

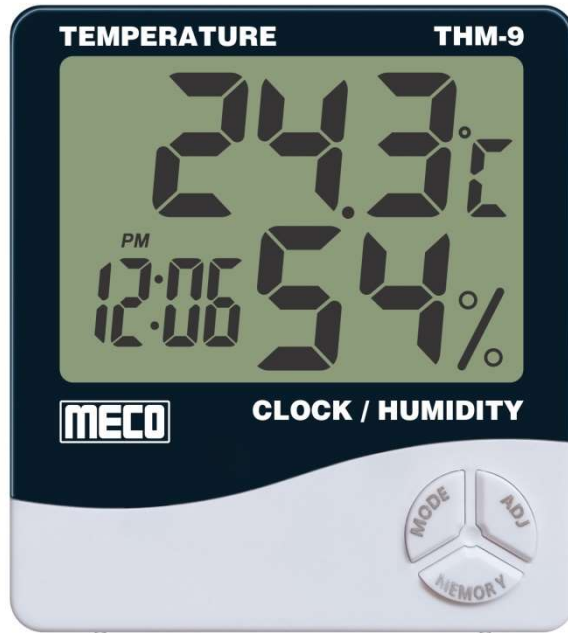

- ✓ Range : -10°C ~ 50°C / 14°F ~ 122°F
- ✓ °C / °F Selection
- ✓ MAX / MIN
- ✓ Integral Hour Alarm
- ✓ Clock & Calendar
- ✓ Display : Temperature, Humidity and Time  
Simultaneously

## Industrial Infrared Thermometers

CE



- ✓ Temperature : -50°C ~ 600°C / -50°F ~ 1112°F
- ✓ °C / °F Selection
- ✓ Laser Switch
- ✓ Low Battery Indication
- ✓ Backlight Display
- ✓ MAX / MIN / DIF / AVG Function
- ✓ Data Storage
- ✓ High / Low Temperature Alarm Setting Function
- ✓ Auto Power Off

## Clamp-On TRMS Power Meter (1000A, 600kW)

CE



- ✓ 1 $\phi$  and 3 $\phi$  (3 $\phi$ 3W / 3 $\phi$ 4W) Power Analyzer
- ✓ 4 Digit 9999 Counts LCD
- ✓ TRUE Power, AC Inrush Current, Phase Angle
- ✓ Dual Display, Autoranging
- ✓ HP, KW, KVA, KVAR, HZ, PF, AC A, AC / DC V
- ✓ Resistance, Capacitance, Temperature
- ✓ Diode Test, Data Hold, Auto Power Off
- ✓ Jaw Opening Cable / Conductor Upto 43mm / Bus Bar Upto 65 x 16mm

## Contact Us

Region	 	
North India & Goa	+91-93244 11558	<a href="mailto:ni1@mecoinst.com">ni1@mecoinst.com</a> <a href="mailto:ni2@mecoinst.com">ni2@mecoinst.com</a>
South India	+91-93242 89268	<a href="mailto:si1@mecoinst.com">si1@mecoinst.com</a> <a href="mailto:si2@mecoinst.com">si2@mecoinst.com</a>
East India, M.P. & Gujarat	+91-93244 05281	<a href="mailto:emg1@mecoinst.com">emg1@mecoinst.com</a> <a href="mailto:emg2@mecoinst.com">emg2@mecoinst.com</a>
Maharashtra	+91-93720 11735	<a href="mailto:mh1@mecoinst.com">mh1@mecoinst.com</a>