



Products for Pharmaceutical

- ✓ Digital Earth Resistance Tester
- ✓ Power Line Transducers
- ✓ Digital Multimeters
- ✓ Digital Clampmeters
- ✓ Digital Insulation Testers
- ✓ Testing & Measuring Instruments
- ✓ Infrared Thermometer
- ✓ Thermal Imaging Camera
- ✓ Power & Harmonics Analyzer

+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable

Digital Earth Resistance Tester



- ✓ 3½ Digit / 1999 Counts LCD
- ✓ Re-Chargeable Batteries
- ✓ Designed to Reject High Levels of Noise & Interference
- ✓ Range Selection & Single Person Operation
- ✓ Low Battery Indication
- ✓ IEC 1010 CAT III 200V
- ✓ Designed to Generally Confirm to IS 10656-1983
- ✓ Capable of Measuring Earth Voltage (0 - 10V AC)

MECO DET 909 is Designed with Technical Know from FUSO Electric Company of Japan.

POWER LINE TRANSDUCERS

CE



- ✓ Low Ripple in Output Signal
- ✓ Choice of Multiple Asymmetrical Outputs
- ✓ Wide Choices of Suppressed Ranges
- ✓ Open and Short Circuit Protection for Outputs
- ✓ Dual Output (Non-Isolated)
- ✓ Self-Powered, AC, DC, SMPS Auxilliary Supply
- ✓ Bi-Directional Outputs
- ✓ Fast Response Time
- ✓ Bi-Directional Inputs for Import / Export

3⁵/₆ Digit 6000 Counts TRMS Autoranging Digital Multimeter

CE



- ✓ 1000V DC & 750V AC
- ✓ 20A DC / AC
- ✓ Holster with Stand
- ✓ Temperature (K Type Thermocouple)
- ✓ Frequency, Capacitance, Resistance & Duty Cycle
- ✓ Diode Test, Audible Continuity, Data Hold
- ✓ Backlight, Auto Power Off
- ✓ CAT IV 600V, CAT III 1000V

3⁵/₆ Digit 6000 Counts 1000A AC - TRMS Digital Clampmeter

CE



- ✓ 1000A AC
- ✓ 1000V DC & 750V AC
- ✓ Resistance, Capacitance & Frequency
- ✓ Temperature (K Type Thermocouple)
- ✓ Duty Cycle, Diode Test & Data Hold
- ✓ Auto / Manual Ranging
- ✓ Micro Amp Measurement for HVAC Flame Sensors

3½ Digit 6000 Counts 600A DC / AC – TRMS Digital Clampmeter


CE



- ✓ 600V & 600A DC / AC
- ✓ Resistance, Capacitance, Frequency
- ✓ Temperature (K Type Thermocouple)
- ✓ NCV (LED, Buzzer & EF Strength)
- ✓ Torch Light + Backlight
- ✓ Duty Cycle
- ✓ Diode Test, Audible Continuity
- ✓ Data Hold
- ✓ Auto Power Off

Digital Insulation Tester

CE

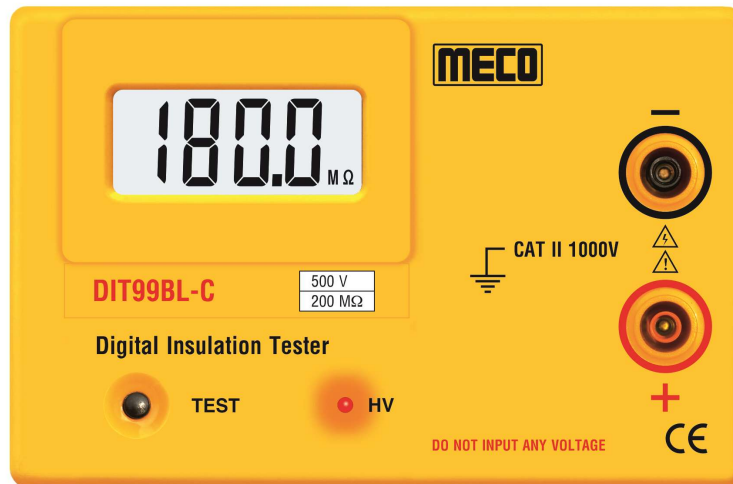

- ✓ Single Person Push Button Operation
- ✓ Meets IEC 61010, CAT II
- ✓ Designed As Per IS 10656-1983
- ✓ Battery Adaptor (Optional - BA Series)

Model	Range	Test Voltage DC
DIT99BL - A	0 - 20 MΩ	100V
DIT99BL - B	0 - 200 MΩ	500V
DIT99BL - C	0 - 200 MΩ	500V
DIT99BL - D	0 - 200 MΩ	500V
DIT99BL - E	0 - 2000 MΩ	1000V

Leakage Current Tester

CE



- ✓ 10 μ A AC Ultra High Resolution
- ✓ 3½ Digit 1999 Counts LCD Display
- ✓ 600V AC / DC
- ✓ AC Current Ranges 0 - 20mA, 200mA, 2A, 60A
- ✓ Wide Frequency Response 40Hz ~ 400 Hz
- ✓ Data Hold
- ✓ Auto Power Off
- ✓ Jaw Opening Cable Dia 30mm max. (approx.)

Phase Sequence Indicator

CE



- ✓ 3 Phase Sequence Indication (LED & Buzzer)
- ✓ Reverse Phase Indication (LED & Buzzer)
- ✓ Open Phase Indication (LED & Buzzer)
- ✓ Handy, Rugged & Self Powered
- ✓ R, Y & B Heavy Duty Probes
- ✓ Insulated Crocodile Clips for Safe Connection
- ✓ Voltage Range 100 ~ 600V AC (PH-PH)
- ✓ Frequency Range 40 ~ 400Hz
- ✓ No Battery Required
- ✓ Easy & Safe to Use

Infrared (Body / Forehead) Thermometer

CE



- ✓ Body Temperature : 36°C ~ 42.9°C / 97°F ~ 109°F
- ✓ Surface Temperature : 0°C ~ 100°C / 32°F ~ 212°F
- ✓ °C / °F Selection
- ✓ Precise Non Contact Measurement
- ✓ Fast Response
- ✓ Read and Memory
- ✓ Green / Orange / Red Backlight
- ✓ Auto Power Off

Infrared (Body / Forehead) Thermometer




- ✓ Body Temperature : 32°C ~ 43°C / 89.6°F ~ 109.4°F
- ✓ Surface Temperature : 0°C ~ 100°C / 32°F ~ 212°F
- ✓ °C / °F Selection
- ✓ Precise Non Contact Measurement
- ✓ Fast Response
- ✓ Read and Memory
- ✓ Green / Orange / Red Backlight
- ✓ Auto Power Off

Temperature & Humidity Meter (with Clock & Calendar)



CE

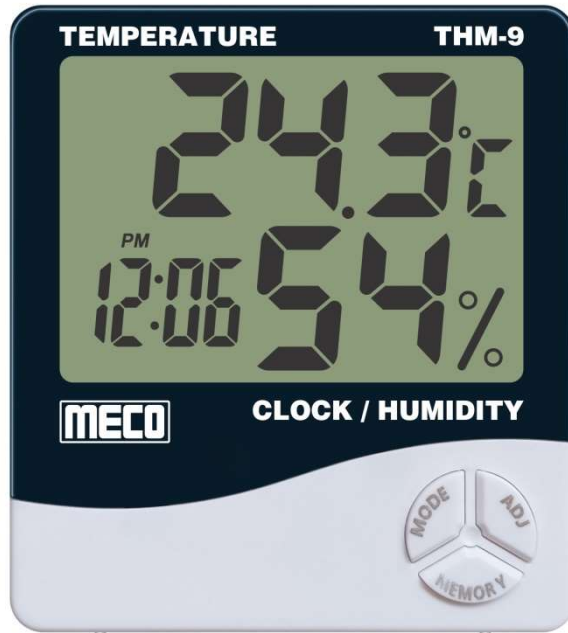

- ✓ Range : -10°C ~ 50°C / 14°F ~ 122°F
- ✓ °C / °F Selection
- ✓ MAX / MIN
- ✓ Integral Hour Alarm
- ✓ Clock & Calendar
- ✓ Display : Temperature, Humidity and Time
Simultaneously

Industrial Infrared Thermometers

CE



- ✓ Temperature : -50°C ~ 600°C / -50°F ~ 1112°F
- ✓ °C / °F Selection
- ✓ Laser Switch
- ✓ Low Battery Indication
- ✓ Backlight Display
- ✓ MAX / MIN / DIF / AVG Function
- ✓ Data Storage
- ✓ High / Low Temperature Alarm Setting Function
- ✓ Auto Power Off

Thermal Imaging Camera

CE



- ✓ 2.4" Color Display
- ✓ Infrared Image Resolution : 60 x 60
- ✓ Total Pixels : 3600, File Format : BMP
- ✓ Temp. Range : -20°C ~ 300°C / -4°F ~ 572°F
- ✓ Wavelength Range : 8 ~ 14μm
- ✓ Storage : Micro SD Card (4 GB)
- ✓ Image Capturing Frequency : 6Hz
- ✓ Palette : Iron Color, Rainbow High Contrast, Gray Scale (Black Glow) & White Scale (White Glow)

Power and Harmonics Analyzer



- ✓ Analysis of 3P4W, 3P3W, 1P2W & 1P3W Systems
- ✓ Display of 35 Parameters in One Screen (3P4W)
- ✓ Programmable CT (1 to 600) and PT (1 to 3000) Ratio
- ✓ Graphic Phasor Diagram, RS-232C-USB Interface
- ✓ TRUE RMS Value, Active Power, Apparent & Reactive Power (KVA, KVAR)
- ✓ RMS, Peak Value and Crest Factor
- ✓ Average/Maximum Demand (KW, MW, KVA, MVA)
- ✓ Analysis of Total Harmonic Distortion (THD-F)

Contact Us

Region	 	
North India & Goa	+91-93244 11558	ni1@mecoinst.com ni2@mecoinst.com
South India	+91-93242 89268	si1@mecoinst.com si2@mecoinst.com
East India, M.P. & Gujarat	+91-93244 05281	emg1@mecoinst.com emg2@mecoinst.com
Maharashtra	+91-93720 11735	mh1@mecoinst.com